

Specification Sheet


Cu, Purity: >99.8%, APS: <12?m

Stock No: NS6130-12-000329, CAS: 7440-50-8

| | | |
|------------------------------------|---|---|
| Product | : | Copper Foil |
| Stock No | : | NS6130-12-000329 |
| CAS | : | 7440-50-8 |
| Purity | : | ≥ 99.8% |
| Thickness | : | 12μm |
| Tensile Strength | : | ≥25 Kg/mm ² |
| Surface density | : | 105-110g/m ² |
| Extensibility | : | ≥2.5% ((25°C %) |
| Roughness Rz | : | ≥3μm |
| Thickness tolerance | : | -0, +3 |
| Width tolerance | : | ±1 |
| Tolerance oxidation susceptibility | : | 160C°/10min.no oxidation |
| Joint | : | 1pcs/roll |
| Roll weight | : | consulted by supplier and acquirer |
| Polished | : | One Side Polished |
| Coarse | : | One Side Coarse |
| Appearance quality convex | : | No oxidation, Smooth and no concave-convex |
| Storage requirement | : | Temperature: 25 °C, Humidity: < 60% RH, There are no corrosive gas and Material, moist Material |
| Main Inspect Verifier | : | Manager QC |

Note: Product Specification are subject to amendment and may change over time

Characterization of Cu, Purity: >99.8%, APS: <12?m

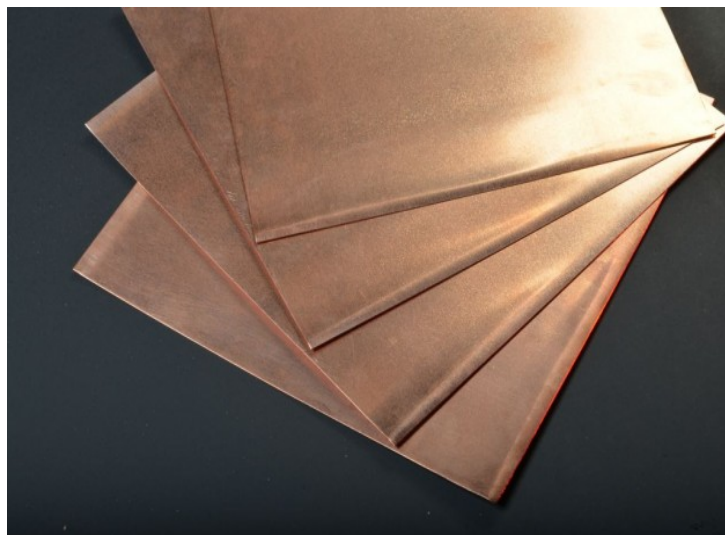

Copper Foil



NANOSHEL
Creating Miracles in Black